



# THE EURO LID

**FOR USE WITH 1200MM X 800MM PALLETS: FOR SAFER AND MORE EFFICIENT INTERNAL AND EXTERNAL HANDLING AND TRANSPORTATION**


The Euro pallet sized Loadhog lid secures level pallet loads contained in conventional and returnable packaging such as plastic containers, tote bins, cardboard boxes, and crates stacked on 1200mm x 800mm wooden or plastic pallets.

## KEY DATA :

- weight: 2 strap: 9.5kg / 4 strap: 12.25kg
- external dimensions: width: 818mm / length: 1218mm / overall height: 105mm
- nesting height: 48mm
- stacking height when nested: 14 units/metre
- maximum load stacking height: 2500mm
- maximum locking load per strap: up to 140kg
- maximum stackable load: 1000kg
- lid and chassis material: recyclable polypropylene
- RFID transponder: ISO 15962 passive tag, read/write 2k bits
- temperature: maximum +40°C, minimum -10°C.


## PRODUCT OPTIONS :

- Colour
- 2 or 4 strap configuration
- Strap customisation
- Tamper evidence tags
- Activated RFID tagging system
- Document holder

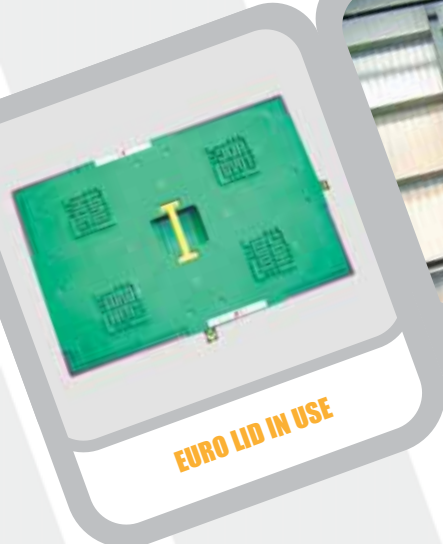


EURO LID IN USE





# THE EURO LID

## OPERATION

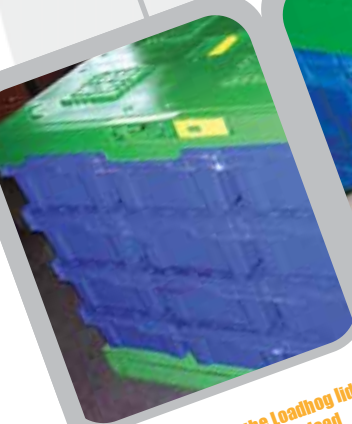

**To apply:** Position the Loadhog lid on the top of the load



Draw the webbing out by pulling out the hook bar



Attach the hook to the runner either side of the centre block holding with foot without bending



Rotate ratchet 'to and fro' until the strap is at your required tension

Repeat sequence for all straps



**To remove:** Slide release button fully to the left



**To unlock:** Push handle firmly to the left until you hear a click and tension releases



Unhook the webbing and guide as it retracts into the lid

Repeat sequence for all straps



CAUTION

